

Last information update: April 2025

Product configuration: QG74

QG74: small body spotlight - neutral white LEDs - electronic ballast and dimmer - wall-washer optic

**Product code**

QG74: small body spotlight - neutral white LEDs - electronic ballast and dimmer - wall-washer optic

Technical description

Adjustable spotlight with adapter for installation on mains electrified track for high output LED lamp with monochrome emission in a Neutral White (4000K) tone. Wall-washer optic. Dimmable electronic ballast integrated in the product. Luminaire made of die-cast aluminium and thermoplastic material, allows 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. The luminaire has mechanical aiming locks for both movements, operated using the same tool on two screws, one at the side of the rod and one on the adapter for the track. Graduated scale for aiming and rotation around the horizontal axis. Passive heat dissipation. Spotlight with standard wall-washer asymmetric screen for a uniform wall washing effect from the top down. Reflector in superpure mirrored aluminium with special faceting that improves the distribution of the light beam.

Installation

on an electrified track or special base

Colour

White (01) | Black (04)

Weight (Kg)

1.42


Mounting

three circuit track|wall surface|ceiling surface

Wiring


electronic components housed in the luminaire

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	1053	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W system:	29.6	Lamp code:	LED
lm source:	2700	Number of lamps for optical assembly:	1
W source:	26	ZVEI Code:	LED
Luminous efficiency (lm/W, real value):	35.6	Number of optical assemblies:	1
lm in emergency mode:	-	Power factor:	See installation instructions
Total light flux at or above an angle of 90° [Lm]:	15	Inrush current:	5 A / 50 µs
Light Output Ratio (L.O.R.) [%]:	39	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 31 luminaires B16A: 50 luminaires C10A: 52 luminaires C16A: 85 luminaires
CRI (minimum):	97	Minimum dimming %:	1
Colour temperature [K]:	4000	Overvoltage protection:	4kV Common mode & 2kV Differential mode
MacAdam Step:	2	Control:	Completo di dimmer

Polar

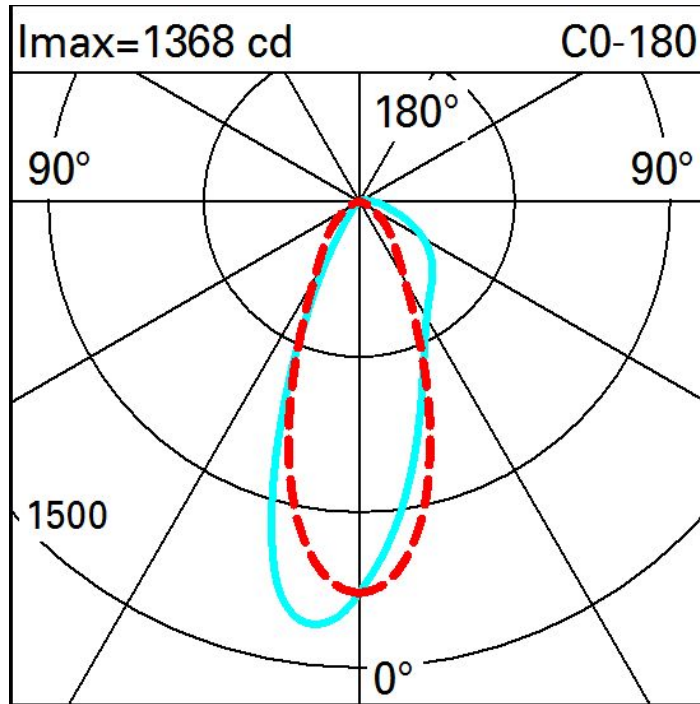

Illuminances

