


Last information update: May 2024

### Product configuration: Q369+Q419.12

Q369: Minimal initial moduleGeneral Up/Down LightL 2397

Q419.12: Plate - General Up / Down Light - DALI - Warm LED - L 1196 - 50.7W 5134lm - 3000K - Aluminium



#### Product code

Q369: Minimal initial moduleGeneral Up/Down LightL 2397

#### Technical description

Initial profile in extruded aluminium - Minimal (frameless) version for flush with ceiling mounting and up-down emission; methacrylate opal lower screen (diffused general light); screen set up for connecting several lengths by overlapping. Methacrylate diffusing screen for upper emission. Light flow split into approx. 70% down / 30% up.

#### Installation

Installation can be pendant-mounted using suitable accessories to be ordered separately. The initial modules can be used individually for various applications if completed with accessory caps and the required LED module.

#### Colour

White (01) | Aluminium (12)

#### Weight (Kg)

5.9

#### Mounting

wall surface|ceiling pendant

#### Wiring

Set up to house the up-down LED modules required by the system.

#### Notes

Take care with the system configuration. To make continuous lines of lighting, use the intermediate modules. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.

Complies with EN60598-1 and pertinent regulations



IP20



#### Product code

Q419.12: Plate - General Up / Down Light - DALI - Warm LED - L 1196 - 50.7W 5134lm - 3000K - Aluminium

#### Technical description

LED module set up for housing in initial or intermediate system profiles - up + down emission. DALI dimmable electronic control gear integrated in the luminaire. Extruded aluminium heat sink; high emission yield flux enhancer. Warm LED.

#### Installation

Module insertion on profiles facilitated by a quick coupling system.

#### Colour

Indeterminate (00)

#### Weight (Kg)

1.4

#### Wiring

Quick coupling terminal block connection to simplify connections between the luminaires. LED module complete with integrated control gear.

Complies with EN60598-1 and pertinent regulations




IP20



#### Technical data

Im system:	10268	Colour temperature [K]:	3000
W system:	101.3	MacAdam Step:	3
Im source:	15100	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	90	Voltage [Vin]:	230
Luminous efficiency (Im/W, real value):	101.4	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	2909	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	68	Number of optical assemblies:	1
CRI (minimum):	80		

# Polar

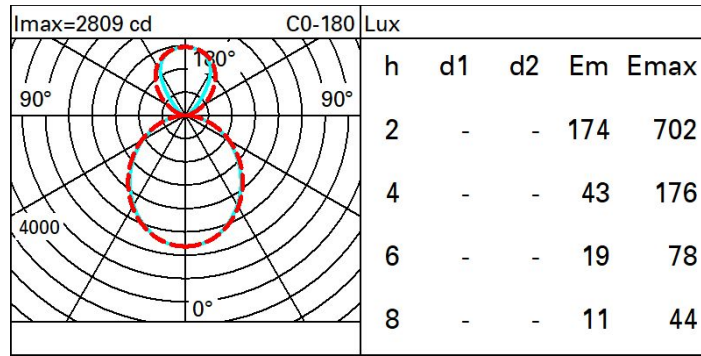

# Isolux

