

Laser Blade XS



Design iGuzzini

iGuzzini

Last information update: April 2024

Product configuration: Q874

Q874: LB XS pendant HC - 9 cells - Wide Flood beam - integrated driver



Product code

Q874: LB XS pendant HC - 9 cells - Wide Flood beam - integrated driver

Technical description

Pendant luminaire with 9 optical elements for LED lamps, ideal for zenithal accent lighting. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient luminous flux and a high level of visual comfort. Metallised thermoplastic high definition Opti-Beam reflectors. Extruded aluminium body and die-cast zamak technical dissipation unit. Thermoplastic ceiling rose with shaped steel fixing plate. PVC power/pendant cable in the same colour as the external finish. The cable connection on the pendant body is fitted with a manual adjustment system that facilitates alignment. ON-OFF driver integrated in luminaire body.

Installation

Ceiling rose with surface fixing plate (screws and screw anchors not included)

Colour

White (01) | Black / Black (43) | Black / White (47) | White/Gold (41)* | Black/gold (44)* | White / burnished chrome (E7)* | Black/burnished chrome (F1)*

Weight (Kg)

0.92

* Colours on request

Mounting

ceiling pendant

Wiring

Connection terminal included on ceiling plate - the pendant cable can be adjusted on the pendant body

Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	1204	Colour temperature [K]:	2700
W system:	17.7	MacAdam Step:	2
lm source:	1450	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	15	Voltage [Vin]:	230
Luminous efficiency (lm/W, real value):	68	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	83	Number of optical assemblies:	1
Beam angle [°]:	58°	Power factor:	See installation instructions
CRI (minimum):	90	Overvoltage protection:	2kV Common mode & 1kV Differential mode


Polar

Imax=1534 cd		CIE		Lux			
				h	d	Em	Emax
90°		nL 0.83		1	1.1	1219	1521
		100-100-100-100-83		2	2.2	305	380
		UGR 15.8-15.8		3	3.3	135	169
1500		DIN A.61		4	4.4	76	95
		UTE					
		0.83A+0.00T					
		F*1=996					
		F*1+F*2=1000					
		F*1+F*2+F*3=1000					
		CIBSE					
		LG3 L<1500 cd/m² at 65°					
		UGR<16 L<1500 cd/mq @65°					
α=58°							

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	79	77	76	78	77	76	73	89
2.0	85	83	81	80	82	80	79	77	93
2.5	86	85	84	83	84	83	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	88	87	86	85	83	100

Luminance curve limit

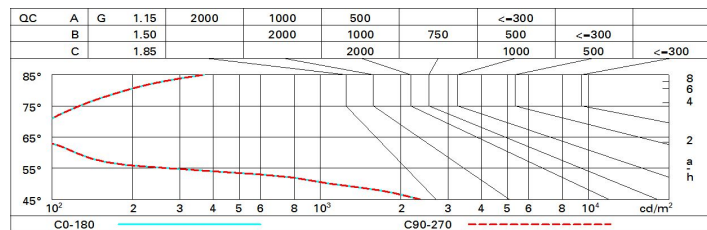

UGR diagram

Corrected UGR values (at 1450 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	16.4	17.0	16.7	17.2	17.5	16.4	17.0	16.7	17.2	17.5
	3H	16.3	16.8	16.6	17.1	17.4	16.3	16.8	16.6	17.1	17.4
	4H	16.2	16.7	16.5	17.0	17.3	16.2	16.7	16.5	17.0	17.3
	6H	16.1	16.6	16.5	16.9	17.2	16.1	16.6	16.5	16.9	17.2
	8H	16.1	16.5	16.5	16.9	17.2	16.1	16.5	16.5	16.9	17.2
	12H	16.1	16.5	16.4	16.8	17.2	16.1	16.5	16.4	16.8	17.2
4H	2H	16.2	16.7	16.5	17.0	17.3	16.2	16.7	16.5	17.0	17.3
	3H	16.1	16.5	16.4	16.8	17.2	16.1	16.5	16.4	16.8	17.2
	4H	16.0	16.3	16.4	16.7	17.1	16.0	16.3	16.4	16.7	17.1
	6H	15.9	16.2	16.3	16.6	17.0	15.9	16.2	16.3	16.6	17.0
	8H	15.8	16.1	16.3	16.5	17.0	15.8	16.1	16.3	16.5	17.0
	12H	15.8	16.0	16.2	16.5	16.9	15.8	16.0	16.2	16.5	16.9
8H	4H	15.8	16.1	16.3	16.5	17.0	15.8	16.1	16.3	16.5	17.0
	6H	15.7	16.0	16.2	16.4	16.9	15.7	16.0	16.2	16.4	16.9
	8H	15.7	15.9	16.2	16.4	16.9	15.7	15.9	16.2	16.4	16.9
	12H	15.6	15.8	16.1	16.3	16.8	15.6	15.8	16.1	16.3	16.8
12H	4H	15.8	16.0	16.2	16.5	16.9	15.8	16.0	16.2	16.5	16.9
	6H	15.7	15.9	16.2	16.4	16.9	15.7	15.9	16.2	16.4	16.9
	8H	15.6	15.8	16.1	16.3	16.8	15.6	15.8	16.1	16.3	16.8
Variations with the observer position at spacing:											
S =	1.0H	6.5 / -24.9					6.5 / -24.9				
	1.5H	9.4 / -25.6					9.4 / -25.6				
	2.0H	11.4 / -25.8					11.4 / -25.8				