


Last information update: February 2025

**Product configuration: QU71**

QU71: Ø 234 mm - neutral - inverter

**Product code**

QU71: Ø 234 mm - neutral - inverter

**Technical description**

A round luminaire that can be surface or pendant-mounted using a kit to be ordered separately. The product is designed to use LED lamps with C.o.B. technology. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. The product is fitted with a passive dissipation system. Luminaire complete with LED lamp in neutral colour tone (4000K). Light emission UGR<19 L<3000 cd/m<sup>2</sup> ideal for environments with video terminals. Product complete with inverter, in case of a blackout, operation is guaranteed for a maximum of 3 hours.

**Installation**

surface or pendant-mounted using a kit to be ordered as an accessory.

**Colour**

White / Aluminium (39) | Black / Aluminium (40)

**Weight (Kg)**

2.45

**Mounting**

ceiling surface

**Wiring**

product complete with electronic components + inverter

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	2898	Colour temperature [K]:	4000
W system:	31.2	MacAdam Step:	2
lm source:	3450	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	23	Lamp code:	LED
Luminous efficiency (lm/W, real value):	92.9	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	84	Power factor:	See installation instructions
CRI (minimum):	90	Control:	On/off


**Polar**

Imax=2745 cd	CIE nL 0.84 94-100-100-100-84 UGR 15.9-15.9 DIN A.61 UTE 0.84A+0.00T F*1=936 F*1+F*2=999 F*1+F*2+F*3=1000 CIBSE LG3 L<1500 cd/m <sup>2</sup> at 65° UGR<16   L<1500 cd/mq @65°	Lux			
		h	d	Em	Emax
90°		2	2.5	534	686
180°		4	5	133	172
90°		6	7.5	59	76
0°		8	10	33	43
α=64°					

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	73	69	66	63	68	65	65	62	74
1.0	77	73	70	68	72	70	69	66	79
1.5	82	79	76	75	78	76	75	72	86
2.0	85	82	81	79	81	80	79	76	91
2.5	86	85	83	82	83	82	81	79	94
3.0	88	86	85	84	85	84	83	81	96
4.0	89	88	87	86	86	86	84	82	98
5.0	89	89	88	87	87	86	85	83	99

Luminance curve limit

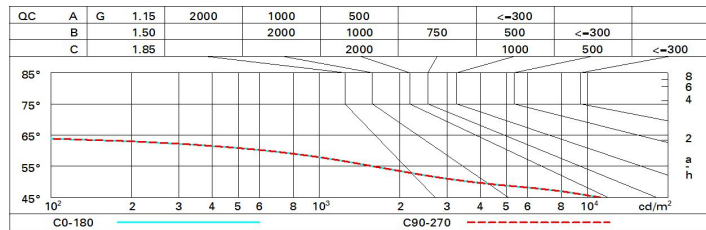

UGR diagram

Corrected UGR values (at 3450 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	10.5	17.2	16.8	17.4	17.7	16.5	17.2	16.8	17.4	17.7
	3H	10.3	17.0	16.7	17.2	17.5	16.3	17.0	16.7	17.2	17.5
	4H	10.3	16.9	16.6	17.1	17.4	16.3	16.9	16.6	17.1	17.5
	6H	10.2	16.7	16.5	17.0	17.4	16.2	16.7	16.5	17.0	17.4
	8H	10.1	16.7	16.5	17.0	17.3	16.2	16.7	16.5	17.0	17.3
	12H	10.1	16.6	16.5	16.9	17.3	16.1	16.6	16.5	16.9	17.3
4H	2H	10.3	16.9	16.6	17.1	17.5	16.3	16.9	16.6	17.1	17.4
	3H	10.1	16.6	16.5	16.9	17.3	16.1	16.6	16.5	16.9	17.3
	4H	10.0	16.5	16.4	16.8	17.2	16.0	16.5	16.4	16.8	17.2
	6H	15.9	16.3	16.4	16.7	17.1	15.9	16.3	16.4	16.7	17.1
	8H	15.9	16.2	16.3	16.7	17.1	15.9	16.2	16.3	16.7	17.1
	12H	15.8	16.2	16.3	16.6	17.0	15.8	16.2	16.3	16.6	17.0
8H	4H	15.9	16.2	16.3	16.7	17.1	15.9	16.2	16.3	16.7	17.1
	6H	15.8	16.1	16.3	16.5	17.0	15.8	16.1	16.3	16.5	17.0
	8H	15.7	16.0	16.2	16.5	17.0	15.7	16.0	16.2	16.5	17.0
	12H	15.7	15.9	16.2	16.4	16.9	15.7	15.9	16.2	16.4	16.9
12H	4H	15.8	16.2	16.3	16.6	17.0	15.8	16.2	16.3	16.6	17.0
	6H	15.7	16.0	16.2	16.5	17.0	15.7	16.0	16.2	16.5	17.0
	8H	15.7	15.9	16.2	16.4	16.9	15.7	15.9	16.2	16.4	16.9
Variations with the observer position at spacing:											
S =	1.0H	4.1 / -13.1				4.1 / -13.1					
	1.5H	6.8 / -25.9				6.8 / -25.9					
	2.0H	8.8 / -37.8				8.8 / -37.8					