



Last information update: April 2025

**Product configuration: QG19**

QG19: Ø 105 mm - neutral white - DALI -WW

**Product code**

QG19: Ø 105 mm - neutral white - DALI -WW

**Technical description**

Round fixed luminaire designed to use LED lamps with C.o.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Dissipater made of painted grey die-cast aluminium. Product complete with LED lamp in neutral white colour tone (4000K). Wall-washer light emission.

**Installation**

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 20 mm.

**Colour**

White / Aluminium (39)

**Weight (Kg)**

0.36

**Mounting**

ceiling surface

**Wiring**

product complete with DALI components

Complies with EN60598-1 and pertinent regulations




On the visible part of the product once installed

**Technical data**

lm system:	1444	Colour temperature [K]:	4000
W system:	13.2	MacAdam Step:	2
lm source:	1900	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	11	Lamp code:	LED
Luminous efficiency (lm/W, real value):	109.4	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	76	Control:	DALI-2
CRI (minimum):	80		

Polar

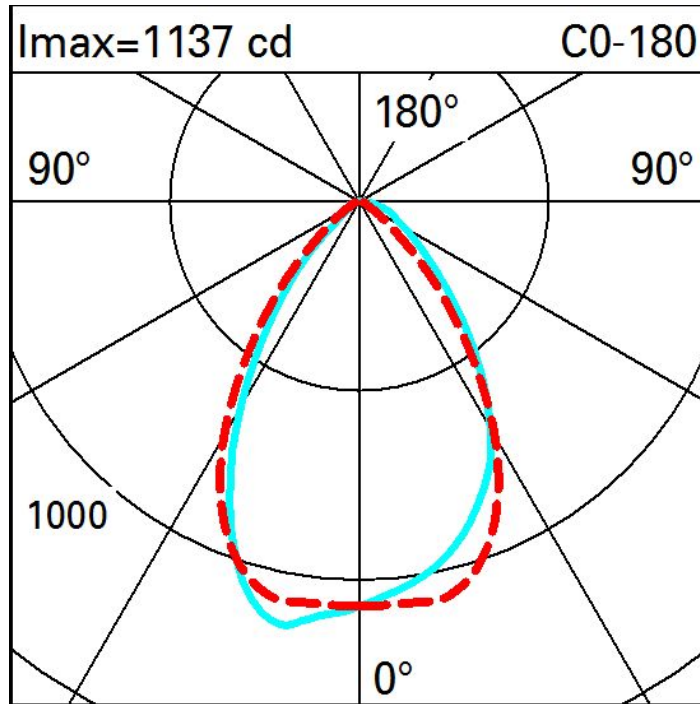

Illuminances

Lux Wall distance = 1m

3						●					
	0.8	2	5	16	47	78	47	16	5	2	0.8
2	1	3	7	25	70	110	70	25	7	3	1
	2	5	13	37	78	104	78	37	13	5	2
1	3	7	17	37	61	73	61	37	17	7	3
	4	9	18	31	41	46	41	31	18	9	4
0											
	m	-2	-1	0	1	2	3				