



Last information update: March 2023

Product configuration: 7045+1728

7045: Ceiling luminaire with "halo" effect 75W A60

**Product code**7045: Ceiling luminaire with "halo" effect 75W A60 **Attention! Code no longer in production****Technical description**

Wall and ceiling-mounted luminaire for public and residential exteriors, designed to use 75W A60 incandescent lamps. The body of the luminaire is made of plastic with a die-cast aluminium frame, while the diffuser is made of textured, internally painted glass. The component-holding box is made of polycarbonate, complete with a polycarbonate safety cover. Stainless steel Allen screws. The luminaire is fitted with a perimeter seal made of EPDM and has a single inlet cable with a PG11 cable gland.

Installation

Fixed to the ceiling or to the wall by three 4mm. fischer screws at 120°.

Colour

White (01) | Grey (15)

Mounting

wall surface


Wiring

Wiring inside the fitting and made up of a three-pole fast-coupling terminal block

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	490	Colour temperature [K]:	2800
W system:	75	Ballast losses [W]:	0
Im source:	950	Voltage [Vin]:	230
W source:	75	Lamp code:	1728
Luminous efficiency (Im/W, real value):	6.5	Socket:	E27
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	48	ZVEI Code:	A 60
Light Output Ratio (L.O.R.) [%]:	52	Number of optical assemblies:	1
CRI:	100	Intervallum temperatura ambiente:	from -20°C to +35°C.

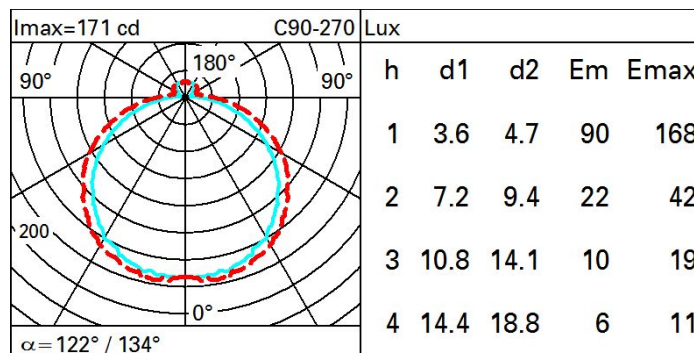Polar

Isolux

