

Last information update: November 2024

### Product configuration: Q420+Q453.12

Q420: Frame initial moduleDown Office / Working UGR < 19L 612

Q453.12: Plate - Down Office / Working UGR < 19 - Warm LED - DALI - L 598 - Aluminium



#### Product code

Q420: Frame initial moduleDown Office / Working UGR < 19L 612

#### Technical description

Initial profile in extruded aluminium - Frame version with contact frame; micro-prismatic screen for controlled luminance emission UGR < 19 - 3000 cd/m<sup>2</sup> (working lighting); screen set up for connecting several lengths by overlapping.

#### Installation

Recessed using the brackets on the profile. The initial modules can be used individually if completed with accessory caps and the required LED module.

**Colour**  
White (01)

**Weight (Kg)**  
2

#### Mounting

ceiling recessed

#### Wiring

Set up to house the LED modules required by the system.

#### Notes

Take care with the system configuration. To make continuous lines of lighting, use the intermediate modules. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.

TPb rated. TPa version available on request, contact iGuzzini for more info

Complies with EN60598-1 and pertinent regulations



#### Product code

Q453.12: Plate - Down Office / Working UGR < 19 - Warm LED - DALI - L 598 - Aluminium

#### Technical description

LED module set up for housing in initial or intermediate system profiles with screen for controlled luminance - down emission. DALI dimmable control gear integrated in the luminaire. Extruded aluminium heat sink; high emission yield flux enhancer. Warm LED.

#### Installation

Module insertion on profiles facilitated by a quick coupling system.

**Colour**  
Indeterminate (00)

**Weight (Kg)**  
0.81

#### Wiring

Quick coupling terminal block connection to simplify connections between the luminaires. LED module complete with integrated dimmable DALI control gear.


Complies with EN60598-1 and pertinent regulations



#### Technical data

Im system:	900	Colour temperature [K]:	3000
W system:	8.4	MacAdam Step:	3
Im source:	1250	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	6.8	Voltage [Vin]:	230
Luminous efficiency (Im/W, real value):	107.1	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	72	Number of optical assemblies:	1
CRI (minimum):	80		


# Polar

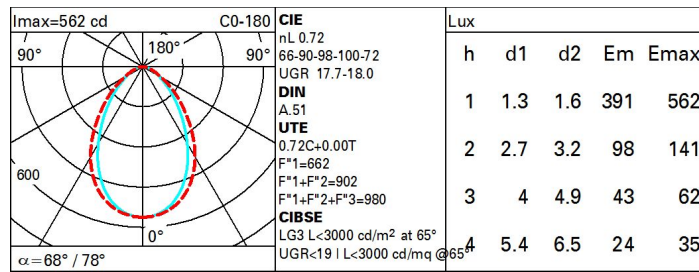

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	54	47	43	40	47	43	42	38	53
1.0	58	52	48	45	51	48	47	43	60
1.5	64	60	56	53	59	56	55	51	71
2.0	68	64	61	59	63	61	60	56	78
2.5	70	67	65	63	66	64	63	60	83
3.0	71	69	67	65	68	66	65	62	86
4.0	73	71	70	68	70	68	67	64	89
5.0	74	72	71	70	71	70	69	66	91

# Luminance curve limit

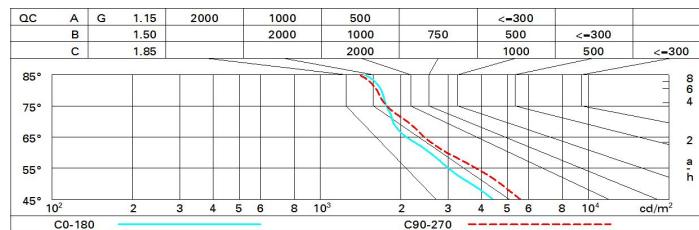

# UGR diagram

Corrected UGR values (at 1250 lm bare lamp luminous flux)												
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise					
2H	2H	15.4	16.4	15.7	16.6	16.9	16.5	17.5	16.8	17.7	18.0	18.0
	3H	16.1	17.0	16.5	17.3	17.6	16.7	17.6	17.0	17.8	18.1	18.1
	4H	16.4	17.3	16.8	17.6	17.9	16.7	17.5	17.1	17.9	18.2	18.2
	6H	16.7	17.5	17.1	17.8	18.2	16.7	17.5	17.1	17.8	18.1	18.1
	8H	16.8	17.6	17.2	17.9	18.3	16.7	17.4	17.1	17.7	18.1	18.1
	12H	16.9	17.6	17.3	17.9	18.3	16.7	17.3	17.0	17.7	18.1	18.1
4H	2H	15.8	16.6	16.2	16.9	17.2	17.4	18.2	17.7	18.5	18.8	18.8
	3H	16.7	17.4	17.1	17.7	18.1	17.7	18.4	18.1	18.8	19.1	19.1
	4H	17.1	17.7	17.5	18.1	18.5	17.8	18.5	18.3	18.8	19.2	19.2
	6H	17.5	18.1	18.0	18.5	18.9	17.9	18.5	18.4	18.9	19.3	19.3
	8H	17.7	18.2	18.1	18.6	19.0	18.0	18.5	18.4	18.9	19.3	19.3
	12H	17.8	18.2	18.2	18.7	19.1	17.9	18.4	18.4	18.8	19.3	19.3
8H	4H	17.3	17.8	17.7	18.2	18.6	18.2	18.7	18.7	19.2	19.6	19.6
	6H	17.8	18.2	18.3	18.7	19.1	18.5	18.9	18.9	19.3	19.8	19.8
	8H	18.0	18.4	18.5	18.9	19.4	18.5	18.9	19.0	19.4	19.9	19.9
	12H	18.2	18.5	18.7	19.0	19.5	18.6	18.9	19.1	19.4	19.9	19.9
12H	4H	17.3	17.7	17.7	18.2	18.6	18.3	18.8	18.8	19.2	19.7	19.7
	6H	17.8	18.2	18.3	18.7	19.2	18.6	18.9	19.0	19.4	19.9	19.9
	8H	18.1	18.4	18.6	18.9	19.4	18.7	19.0	19.2	19.5	20.0	20.0
Variations with the observer position at spacing:												
S =		1.0H	0.4 / -0.5		0.3 / -0.4							
		1.5H	0.5 / -1.0		0.7 / -1.2							
		2.0H	1.1 / -1.4		1.6 / -1.6							