

Last information update: February 2025

**Product configuration: QW38.F6**

QW38.F6: Ø 225 mm - warm white - INVERTER - UGR<19 - White/Transparent/Chrome



**Product code**

QW38.F6: Ø 225 mm - warm white - INVERTER - UGR<19 - White/Transparent/Chrome

**Technical description**

Round fixed luminaire designed to use LED lamps with C.o.B. technology. Version with rim for surface-mounting. Prismatic thermoplastic reflector complete with flux enhancer and anti-glare screen located at the centre of the optic. The anti-glare screen is made of thermoplastic vacuum-metallised with aluminium vapours finished with a protective anti-scratch layer. Dissipater made of painted grey die-cast aluminium. Product complete with LED lamp in warm white colour tone (3000K). Light emission UGR<19 L<3000 cd/m2 ideal for environments with video terminals. Luminaire complete with inverter for safety light.

**Installation**

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 25 mm.

**Colour**

White/Transparent/Chrome (F6)

**Weight (Kg)**

1.73


**Mounting**

ceiling surface

**Wiring**

product complete with INVERTER

Complies with EN60598-1 and pertinent regulations



**Technical data**

lm system:	3827	Colour temperature [K]:	3000
W system:	41	MacAdam Step:	2
lm source:	4450	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	32	Lamp code:	LED
Luminous efficiency (lm/W, real value):	93.3	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	86	Control:	On/off
CRI (minimum):	90		


**Polar**

<p>Imax=3385 cd α=65°</p>	<p><b>CIE</b> nL 0.86 91-99-100-100-86 UGR 16.7-16.6</p> <p><b>DIN</b> A.61</p> <p><b>UTE</b> 0.86A+0.00T F*1=910 F*1+F*2=988 F*1+F*2+F*3=997</p> <p><b>CIBSE</b> LG3 L&lt;3000 cd/m² at 65° UGR&lt;19   L&lt;3000 cd/mq @65°</p>	<b>Lux</b>			
		h	d	Em	Emax
		2	2.6	662	840
		4	5.1	165	210
		6	7.7	74	93
8	10.2	41	52		

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	74	69	66	63	68	65	65	62	72
1.0	78	74	71	68	73	70	70	66	77
1.5	83	80	77	75	79	76	76	73	84
2.0	86	84	82	80	82	81	80	77	90
2.5	88	86	85	83	85	83	82	80	93
3.0	89	88	86	85	86	85	84	82	95
4.0	90	89	88	88	88	87	86	83	97
5.0	91	90	89	89	89	88	87	84	98

Luminance curve limit

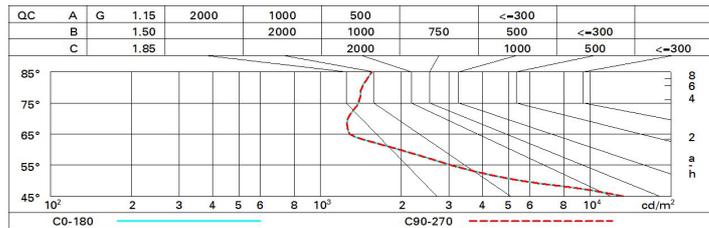

UGR diagram

Corrected UGR values (at 450 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	17.0	17.6	17.3	17.9	18.1	17.0	17.6	17.3	17.9	18.1
	3H	16.9	17.5	17.2	17.8	18.0	16.9	17.5	17.2	17.7	18.0
	4H	16.9	17.4	17.2	17.7	18.0	16.8	17.4	17.2	17.7	18.0
	6H	16.8	17.3	17.2	17.6	18.0	16.7	17.2	17.1	17.6	17.9
	8H	16.8	17.3	17.2	17.6	17.9	16.7	17.2	17.1	17.5	17.9
	12H	16.8	17.2	17.2	17.6	17.9	16.7	17.1	17.0	17.5	17.8
4H	2H	16.8	17.4	17.2	17.7	18.0	16.9	17.4	17.2	17.7	18.0
	3H	16.7	17.2	17.1	17.5	17.9	16.8	17.2	17.1	17.6	17.9
	4H	16.7	17.1	17.1	17.5	17.9	16.7	17.1	17.1	17.5	17.9
	6H	16.7	17.0	17.1	17.4	17.8	16.6	17.0	17.1	17.4	17.8
	8H	16.7	17.0	17.1	17.4	17.8	16.6	16.9	17.0	17.3	17.8
	12H	16.6	16.9	17.1	17.4	17.8	16.5	16.8	17.0	17.3	17.7
8H	4H	16.6	16.9	17.0	17.3	17.8	16.7	17.0	17.1	17.4	17.8
	6H	16.6	16.9	17.1	17.3	17.8	16.6	16.9	17.1	17.3	17.8
	8H	16.6	16.8	17.1	17.3	17.8	16.6	16.8	17.1	17.3	17.8
	12H	16.6	16.8	17.1	17.3	17.8	16.6	16.8	17.1	17.2	17.8
12H	4H	16.5	16.8	17.0	17.3	17.7	16.6	16.9	17.1	17.4	17.8
	6H	16.6	16.8	17.0	17.3	17.7	16.6	16.8	17.1	17.3	17.8
	8H	16.6	16.8	17.1	17.2	17.8	16.6	16.8	17.1	17.3	17.8
Variations with the observer position at spacing:											
S =	1.0H	3.6 / -6.0					3.6 / -6.0				
	1.5H	6.2 / -7.2					6.2 / -7.2				
	2.0H	8.2 / -7.6					8.2 / -7.6				