


Last information update: March 2025

Product configuration: 335A.01

335A.01: SIPARIO Ø86 spotlight - DALI - WideFlood - OBLens - - 18W 1279.8lm - 2700K - CRI 97 - White

**Product code**

335A.01: SIPARIO Ø86 spotlight - DALI - WideFlood - OBLens - - 18W 1279.8lm - 2700K - CRI 97 - White

Technical description

Ø86 adjustable spotlight with adapter for installation on a base or electrified track. LED lamp with C.O.B. (Chip on board) technology, -CRI97- high colour rendering and 2700K tone.

Die-cast aluminium body with thermoplastic rear cap and front ring (Mass-Balance). The product can be rotated by 360° around the vertical axis with a mechanical lock and tilted by 90° relative to the horizontal plane. Passive heat dissipation.

OptiBeam Lens optical system with WideFlood optic.

Dimmable electronic DALI-2 power supply integrated in the body of the luminaire.

Spotlight with Push&Go system designed to facilitate and safely accelerate the connection between product and optic accessory. Mechanically disconnecting the accessory allows it to be disengaged but not dropped. Three internal accessories and one external one can be used simultaneously. All internal accessories rotate 360° about the spotlight longitudinal axis.

Installation

Base or mains voltage track.

Colour
White (01)

Weight (Kg)
0.87

Mounting

three circuit track

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	1280	CRI (minimum):	97
W system:	18	Colour temperature [K]:	2700
lm source:	1620	MacAdam Step:	2
W source:	16	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	71.1	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	79	Number of optical assemblies:	1
Beam angle [°]:	47°	Control:	DALI-2


Polar

Imax=1937 cd		CIE nL 0.79 94-100-100-100-79 UGR 17.9-17.9 DIN A.61 UTE 0.79A+0.00T F*1=940 F*1+F*2=996 F*1+F*2+F*3=1000 CIBSE LG3 L<3000 cd/m² at 65° UGR<19 L<3000 cd/mq @65°	Lux			
90°	180°		h	d	Em	E _{max}
90°	180°		2	1.7	375	484
			4	3.5	94	121
			6	5.2	42	54
			8	7	23	30

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	69	65	62	60	64	62	61	58	74
1.0	73	69	66	64	68	66	65	63	79
1.5	77	74	72	70	73	71	71	68	86
2.0	80	78	76	74	76	75	74	72	91
2.5	81	80	78	77	79	77	76	74	94
3.0	82	81	80	79	80	79	78	76	96
4.0	83	82	82	81	81	81	79	77	98
5.0	84	83	83	82	82	81	80	78	99

Luminance curve limit

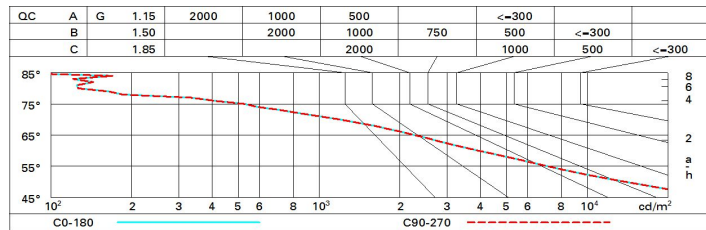

UGR diagram

Corrected UGR values (at 1620 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	18.4	19.1	18.7	19.3	19.5	18.4	19.1	18.7	19.3	19.5
	3H	18.3	18.9	18.6	19.1	19.4	18.3	18.9	18.6	19.2	19.4
	4H	18.2	18.8	18.6	19.1	19.4	18.2	18.8	18.6	19.1	19.4
	6H	18.2	18.6	18.5	19.0	19.3	18.2	18.7	18.5	19.0	19.3
	8H	18.1	18.6	18.5	18.9	19.3	18.1	18.6	18.5	18.9	19.3
12H	18.1	18.5	18.5	18.9	19.2	18.1	18.5	18.5	18.9	19.2	
4H	2H	18.2	18.8	18.6	19.1	19.4	18.2	18.8	18.6	19.1	19.4
	3H	18.1	18.6	18.5	18.9	19.2	18.1	18.6	18.5	18.9	19.2
	4H	18.0	18.4	18.4	18.8	19.2	18.0	18.4	18.4	18.8	19.2
	6H	17.9	18.3	18.4	18.7	19.1	17.9	18.3	18.4	18.7	19.1
	8H	17.9	18.2	18.3	18.6	19.1	17.9	18.2	18.3	18.6	19.1
12H	17.8	18.1	18.3	18.6	19.0	17.8	18.1	18.3	18.6	19.0	
8H	4H	17.9	18.2	18.3	18.6	19.1	17.9	18.2	18.3	18.6	19.1
	6H	17.8	18.1	18.3	18.5	19.0	17.8	18.1	18.3	18.5	19.0
	8H	17.7	18.0	18.2	18.4	18.9	17.7	18.0	18.2	18.4	18.9
	12H	17.7	17.9	18.2	18.4	18.9	17.7	17.9	18.2	18.4	18.9
12H	4H	17.8	18.1	18.3	18.6	19.0	17.8	18.1	18.3	18.6	19.0
	6H	17.7	18.0	18.2	18.4	18.9	17.7	18.0	18.2	18.4	18.9
	8H	17.7	17.9	18.2	18.4	18.9	17.7	17.9	18.2	18.4	18.9
Variations with the observer position at spacing:											
S =	1.0H	4.0 / -8.3					4.0 / -8.3				
	1.5H	6.7 / -12.5					6.7 / -12.5				
	2.0H	8.6 / -15.4					8.6 / -15.4				