

Reflex

Design iGuzzini



iGuzzini

Last information update: May 2024

Product configuration: MV60+PA55.01

MV60: Fixed circular recessed luminaire - Ø125 mm - warm white - flood optic - UGR<19

PA55.01: Minimal flange - White

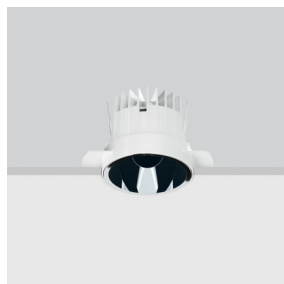

Product code

MV60: Fixed circular recessed luminaire - Ø125 mm - warm white - flood optic - UGR<19 **Attention! Code no longer in production**

Technical description

Fixed round luminaire designed to use a LED lamp with C.O.B. technology. Version without rim for mounting flush with ceiling. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with LED lamp in warm white colour tone (3000K). General light emission, with controlled luminance UGR<19 1500 cd/m² α>65° flood optic.

Installation

Installation flush with the ceiling is for false ceilings 12.5 mm thick

Colour

Aluminium (12)

Weight (Kg)

1.08

Mounting

ceiling recessed

Wiring

product complete with an electronic ballast

Complies with EN60598-1 and pertinent regulations



IP20

IP43

On the visible part of the product once installed



Accessory code

PA55.01: Minimal flange - White **Attention! Code no longer in production**

Technical description

Adapter for plasterboard false ceilings and rapid flush with ceiling installations, specifically for fixed and wall washer Reflex recessed luminaires. Made of plastic with a border for limiting plaster and holes for installation with screws and anchors suitable for plasterboard (included). Fastening the adapter to the installation surface does not require predefined panel thicknesses.

Installation

Preparation hole Ø 133 mm. Fastening the perforated perimeter rim to the installation surface (fixing screws included) - subsequent operations including filling, smoothing to the reference border and finishing - final insertion of the recessed luminaire (separate code) in the adapter.

Colour

White (01)

Weight (Kg)

0.06

Mounting


ceiling recessed

Complies with EN60598-1 and pertinent regulations

Technical data

| | | | |
|--|-------|---------------------------------------|---------------------------------|
| Im system: | 1801 | CRI (minimum): | 80 |
| W system: | 15.4 | Colour temperature [K]: | 3000 |
| Im source: | 2050 | MacAdam Step: | 2 |
| W source: | 13 | Life Time LED 1: | > 50,000h - L80 - B10 (Ta 25°C) |
| Luminous efficiency (Im/W, real value): | 116.9 | Lamp code: | LED |
| Im in emergency mode: | - | Number of lamps for optical assembly: | 1 |
| Total light flux at or above an angle of 90° [Lm]: | 0 | ZVEI Code: | LED |
| Light Output Ratio (L.O.R.) [%]: | 88 | Number of optical assemblies: | 1 |
| Beam angle [°]: | 24° | | |


Polar

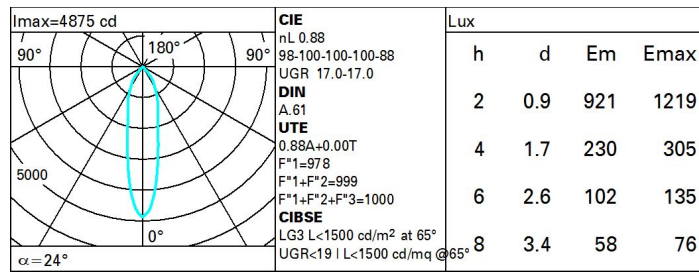

Utilisation factors

| R | 77 | 75 | 73 | 71 | 55 | 53 | 33 | 00 | DRR |
|------|----|----|----|----|----|----|----|----|-----|
| K0.8 | 79 | 74 | 71 | 69 | 74 | 71 | 70 | 68 | 77 |
| 1.0 | 82 | 78 | 76 | 73 | 77 | 75 | 75 | 72 | 82 |
| 1.5 | 86 | 84 | 81 | 79 | 83 | 81 | 80 | 77 | 88 |
| 2.0 | 89 | 87 | 85 | 84 | 86 | 84 | 83 | 81 | 92 |
| 2.5 | 91 | 89 | 88 | 87 | 88 | 87 | 86 | 84 | 95 |
| 3.0 | 92 | 91 | 90 | 89 | 89 | 89 | 88 | 85 | 97 |
| 4.0 | 93 | 92 | 92 | 91 | 91 | 90 | 89 | 87 | 99 |
| 5.0 | 94 | 93 | 93 | 92 | 92 | 91 | 90 | 88 | 100 |

Luminance curve limit

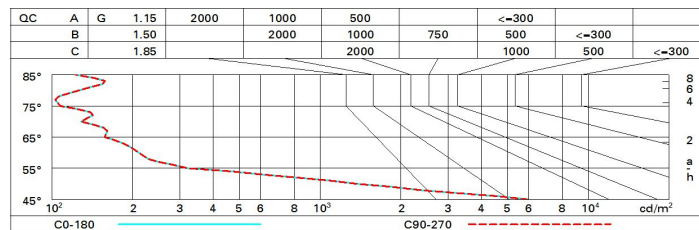

UGR diagram

| Corrected UGR values (at 2050 lm bare lamp luminous flux) | | | | | | | | | | | | |
|--|-----|---------------------|-------------|------|------|------|-------------------|------|------|------|------|------|
| Reflect.: ceiling/cav walls work pl. Room dim x y | | 0.70 | 0.70 | 0.50 | 0.50 | 0.30 | 0.70 | 0.70 | 0.50 | 0.50 | 0.30 | 0.30 |
| | | 0.50 | 0.30 | 0.50 | 0.30 | 0.30 | 0.50 | 0.30 | 0.50 | 0.30 | 0.30 | 0.30 |
| | | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 |
| | | viewed crosswise | | | | | viewed endwise | | | | | |
| 2H | 2H | 17.6 | 18.2 | 17.8 | 18.5 | 18.7 | 17.6 | 18.2 | 17.8 | 18.5 | 18.7 | |
| | 3H | 17.4 | 18.0 | 17.7 | 18.3 | 18.6 | 17.4 | 18.0 | 17.7 | 18.3 | 18.6 | |
| | 4H | 17.3 | 17.9 | 17.7 | 18.2 | 18.5 | 17.3 | 17.9 | 17.7 | 18.2 | 18.5 | |
| | 6H | 17.3 | 17.8 | 17.6 | 18.1 | 18.4 | 17.3 | 17.8 | 17.6 | 18.1 | 18.4 | |
| | 8H | 17.2 | 17.7 | 17.6 | 18.0 | 18.4 | 17.2 | 17.7 | 17.6 | 18.0 | 18.4 | |
| | 12H | 17.2 | 17.7 | 17.6 | 18.0 | 18.3 | 17.2 | 17.7 | 17.6 | 18.0 | 18.3 | |
| 4H | 2H | 17.3 | 17.9 | 17.7 | 18.2 | 18.5 | 17.3 | 17.9 | 17.7 | 18.2 | 18.5 | |
| | 3H | 17.2 | 17.7 | 17.6 | 18.0 | 18.3 | 17.2 | 17.7 | 17.6 | 18.0 | 18.3 | |
| | 4H | 17.1 | 17.5 | 17.5 | 17.9 | 18.3 | 17.1 | 17.5 | 17.5 | 17.9 | 18.3 | |
| | 6H | 17.0 | 17.4 | 17.4 | 17.8 | 18.2 | 17.0 | 17.4 | 17.4 | 17.8 | 18.2 | |
| | 8H | 17.0 | 17.3 | 17.4 | 17.7 | 18.1 | 17.0 | 17.3 | 17.4 | 17.7 | 18.1 | |
| | 12H | 16.9 | 17.2 | 17.4 | 17.6 | 18.1 | 16.9 | 17.2 | 17.4 | 17.6 | 18.1 | |
| 8H | 4H | 17.0 | 17.3 | 17.4 | 17.7 | 18.1 | 17.0 | 17.3 | 17.4 | 17.7 | 18.1 | |
| | 6H | 16.9 | 17.1 | 17.3 | 17.6 | 18.1 | 16.9 | 17.1 | 17.3 | 17.6 | 18.1 | |
| | 8H | 16.8 | 17.1 | 17.3 | 17.5 | 18.0 | 16.8 | 17.1 | 17.3 | 17.5 | 18.0 | |
| | 12H | 16.8 | 17.0 | 17.3 | 17.5 | 18.0 | 16.8 | 17.0 | 17.3 | 17.5 | 18.0 | |
| 12H | 4H | 16.9 | 17.2 | 17.4 | 17.6 | 18.1 | 16.9 | 17.2 | 17.4 | 17.6 | 18.1 | |
| | 6H | 16.8 | 17.1 | 17.3 | 17.5 | 18.0 | 16.8 | 17.1 | 17.3 | 17.5 | 18.0 | |
| | 8H | 16.8 | 17.0 | 17.3 | 17.5 | 18.0 | 16.8 | 17.0 | 17.3 | 17.5 | 18.0 | |
| Variations with the observer position at spacing: | | | | | | | | | | | | |
| S = | | 1.0H | 4.4 / -24.6 | | | | 4.4 / -24.6 | | | | | |
| | | 1.5H | 7.2 / -25.8 | | | | 7.2 / -25.8 | | | | | |
| | | 2.0H | 9.2 / -26.2 | | | | 9.2 / -26.2 | | | | | |