

Comfort


Design Mario
Cucinella

iGuzzini

Last information update: February 2023

Product configuration: B581+L078

B581: Recessed Comfort square 26W TC-DEL



Product code

B581: Recessed Comfort square 26W TC-DEL **Attention! Code no longer in production**

Technical description

Wall and ceiling luminaire for public residential areas using 1x26W TC-DEL compact fluorescent lamps. The body and the frame are made of die-cast aluminium. Complete with glass protection screen. Translucent polycarbonate component-holding box with polycarbonate cover. Stainless steel screws with hexagonal head. EPDM perimetral seal for through wiring by means of PG11 cable-clamp.

Installation

Recessed into the wall. Hole diameter 277 mm, depth 50 mm. A polystyrene body moulding cover (code 0045) is placed in the formwork to either create the housing for the luminaire in the concrete or to finish the housing in the wall.

Colour

Grey (15)

Mounting

wall recessed

Wiring

Wiring contained in the body of the fitting: 230V 50Hz low loss electronic ballasts, 3-pole fast coupling terminal boards, silicone cables, radio interference filter.


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	322	Colour temperature [K]:	4000
W system:	28	Ballast losses [W]:	2
Im source:	1800	Voltage [Vin]:	230
W source:	26	Lamp code:	L078
Luminous efficiency (Im/W, real value):	11.5	Socket:	G24q-3
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	19	ZVEI Code:	TC-DEL
Light Output Ratio (L.O.R.) [%]:	18	Number of optical assemblies:	1
CRI:	85	Intervalllo temperatura ambiente:	from -20°C to +35°C.

Polar

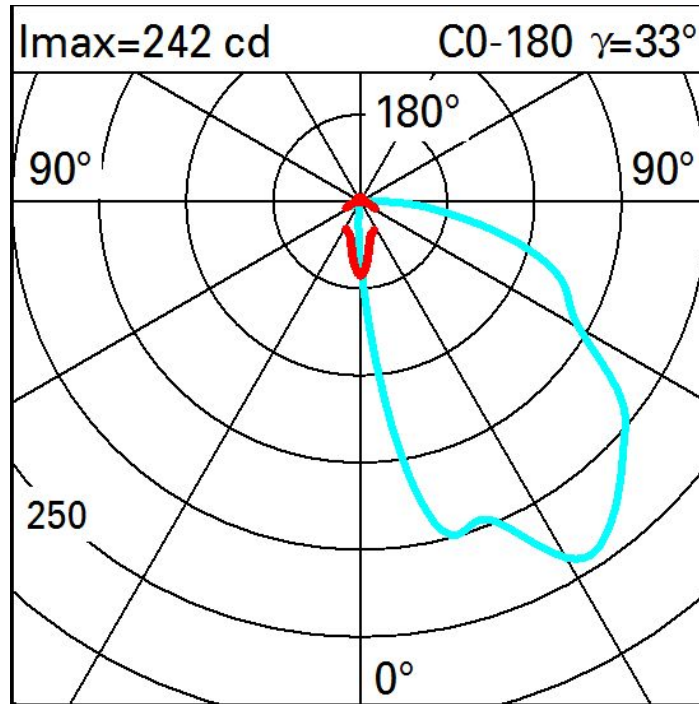

Illuminances

